



Patented



### Feature

- The Evo50 module fits our custom mounting rings and are adaptable to fit most existing MR-16 type fittings
- Anti-glare reflector with 2 beam angles, which directly replicates MR-16 halogen beam angles
- Thermal-optimal design ensures long lifetime
- Aesthetically pleasing design
- Delivers higher light output than a **MR16 50W halogen**
- 3 Year Warranty

### Temperature

- Ambient operating temperature: -20°C~+40°C
- Storage temperature: -30°C~+60°C

## Evo50 SPECIFICATION

Replace Halogen 50W




Evo50 R10 Deliver 1,100 Lm outperforms 50W and 75W halogen

1000 Lm ~ 1100 Lm MODELS




Item No	Product Code	Downlight output	CD	LED Power	System Power	CRI	CCT	LED Brand
07935	LED-EVO50-R10-36-3K	1100 lm	2424 cd	13 W	16 W	83	3000K	CITIZEN
07937	LED-EVO50-R10-36-4K	1150 lm	2532 cd	13 W	16 W	83	4000K	CITIZEN
08061	LED-EVO50-R10-60-3K	1100 lm	1393 cd	13 W	16 W	83	3000K	CITIZEN
08063	LED-EVO50-R10-60-4K	1150 lm	1457 cd	13 W	16 W	83	4000K	CITIZEN

Housing: aluminium with nickel coated.  
Reflector: PC with AL plating  
Safety Glass coated with high transmittance film  
Weight: 105g

### Evo50-R10 36°



### Evo50-R10 60°

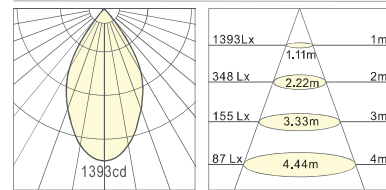

Module package only

LED: CRI 90 version is optional

LED Driver :

External Driver (CE/CB certified)

Mains Dim: standard