



Feature

- IP40
- Thermally engineered heatsink producing much cooler operating temperatures
- Easy to install with two spring clips
- Stylish and aesthetically pleasing design
- High grade diffuser provides uniform light
- Glareless reflector creates visual comfort, cut-off angle 25°
- 3 Year Warranty

E6R SPECIFICATION





Housing: Die-cast aluminium, powder coated
Diffuser: High grade PMMA
Reflector: High reflective mirror-finish
Weight: 1300g

E6R-20C Downlight is equivalent to 2x26W CFL downlight

2000 Lm ~ 2200 Lm MODELS

Product Code	Downlight output	LED Power	System Power	CRI	CCT	LED Brand
LED-EVO-E6R-20C-3K	2000 lm	22 W	26 W	83	3000K	SAMSUNG
LED-EVO-E6R-20C-4K	2200 lm	22 W	26 W	83	4000K	SAMSUNG

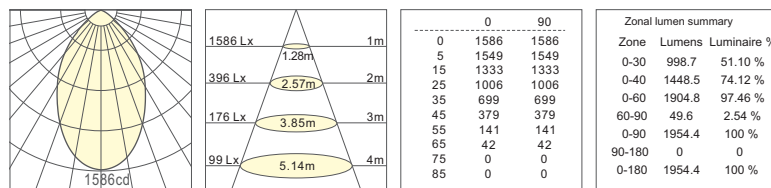

LED Driver :
External Driver (CE/ CB certified)
Mains Dim / 0-10V / DALI options

Temperature

- Ambient operating temperature:
-20° C~+40° C
- Storage temperature:
-30° C~+60° C

