

# ARCHITECTURAL Flexible LED Strip

## Higher Efficacy - Effi-Plus Standard Output LED Strip

*The Effi-Plus Standard Output LED Strip, is extremely versatile and suitable for a large number of applications.*

### Applications:

- Architectural cove lighting
- Architectural concealed applications
- Architectural joinery applications
- Under bench applications

### Product Specification:

**Over 120Lm per/watt**

Input Voltage: **24VDC**

Power Consumption: 7.2 watts per meter

LED Quantity: 70 x SMD LEDs

LED Lifespan: 70,000 hours

IP Rating: IP20

Lumens: Approx 900Lm per/M

LED Spacing: 14.28mm

Cutting Interval: 100mm

Beam Angle: 120°

Dimensions (WxH/mm): 8x1.2

Operating Temp: -20~45°C


Weight: 120g

Roll Length: 5m

**IES files available on request.**

**90 CRI Standard**

**Binning in 3 step MacAdam**

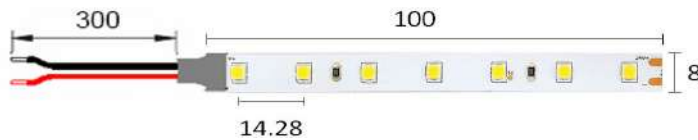

Item No	Product Code	Description
14530	LED-FLS-70-980CW	Effi-Plus Standard Output LED Strip-70LEDs Cool White <b>6000K-6500K</b> 24V 7.2W 900Lm
14531	LED-FLS-70-980NW	Effi-Plus Standard Output LED Strip-70LEDs Neutral White <b>3800K-4200K</b> 24V 7.2W 900Lm
14532	LED-FLS-70-980WW	Effi-Plus Standard Output LED Strip-70LEDs Warm White <b>2900K-3200K</b> 24V 7.2W 900Lm
14533	LED-FLS-70-980UW	Effi-Plus Standard Output LED Strip-70LEDs Ultra Warm <b>2500K-2700K</b> 24V 7.2W 900Lm
14534	LED-FLS-70-980CW-F	Effi-Plus Standard Output WP LED Strip-70LEDs Cool White <b>6000K-6500K</b> 24V 7.2W 900Lm <b>IP65</b>
14535	LED-FLS-70-980NW-F	Effi-Plus Standard Output WP LED Strip-70LEDs Neutral White <b>3800K-4200K</b> 24V 7.2W 900Lm <b>IP65</b>
14536	LED-FLS-70-980WW-F	Effi-Plus Standard Output WP LED Strip-70LEDs Warm White <b>2900K-3200K</b> 24V 7.2W 900Lm <b>IP65</b>
14537	LED-FLS-70-980UW-F	Effi-Plus Standard Output WP LED Strip-70LEDs Ultra Warm <b>2500K-2700K</b> 24V 7.2W 900Lm <b>IP65</b>

**When Colour Consistency and Lumen Depreciation Matter**