

ARCHITECTURAL Flexible LED Strip

LED Strip - Standard LED Ribbon

The SMD LED Ribbon, is extremely versatile and suitable for a large number of applications.


Applications:

- Architectural concealed applications
- Architectural joinery applications
- Architectural highlighting
- Architectural steps and stairs

Product Specification:

Input Voltage: 12VDC
 Power Consumption: 4.8 watts maximum
 LED Quantity: 60 x SMD LEDs
 LED Lifespan: 50,000 hours
 Lumens Approx - 350Lm per/M
 LED Spacing: 16.6mm
 Cutting Interval: 50mm
 Beam Angle: 120°
 Dimensions (WxH/mm): 8x2.5
 Operating Temp: -20~40°C
 Weight: 85g
 Roll Length: 5m

***IES files available on request.**

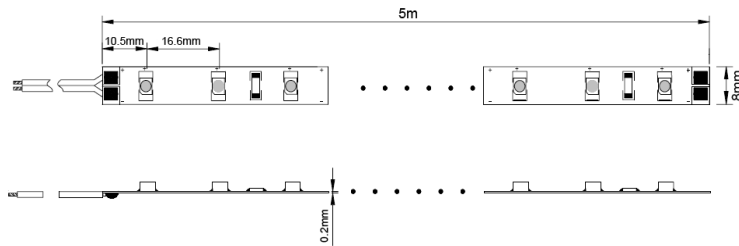

Item No	Product Code	Description
14310	LED-FLS-60-CW	Standard Output SMD LED Strip-60leds Cool White 6000-7000K 4.8W 350Lm
14311	LED-FLS-60-NW	Standard Output SMD LED Strip-60leds Neutral White 4000-4500K 4.8W 350Lm
14312	LED-FLS-60-WW	Standard Output SMD LED Strip-60leds Warm White 3000-3500K 4.8W 350Lm
14313	LED-FLS-60-UW	Standard Output SMD LED Strip-60leds Ultra Warm 2300-2700K 4.8W 350Lm
14350	LED-FLS-60-CW-F	Standard Output SMD WP Strip-60leds Cool White 6000-7000K 4.8W 350Lm IP65
14351	LED-FLS-60-NW-F	Standard Output SMD WP Strip-60leds Neutral White 4000-4500K 4.8W 350Lm IP65
14352	LED-FLS-60-WW-F	Standard Output SMD WP Strip-60leds Warm White 3000-3500K 4.8W 350Lm IP65
14353	LED-FLS-60-UW-F	Standard Output SMD WP Strip-60leds Ultra Warm 2300-2700K 4.8W 350Lm IP65

When Colour Consistency and Lumen Depreciation Matter