

ARCHITECTURAL Flexible LED Strip

LED Strip - Ultra Thin 3.5mm LED Ribbon

The Ultra Thin 3.5mm SMD LED Ribbon is extremely versatile and suitable for high light output in applications where space is limited.



Applications:

- Architectural shadow line applications
- Narrow applications

Product Specification:

Input Voltage: **24VDC**
 Power Consumption: 24 watts maximum
 LED Quantity: 120 x SMD LEDs
 LED Lifespan: 50,000 hours
 IP Rating: IP20
 Lumens: 1800Lm per/M
 LED Spacing: 8.33mm
 Cutting Interval: 50mm
 Beam Angle: 120°
 Dimensions (WxH/mm): 3.5x1
 Operating Temp: -20~45°C
 Weight: 90g
 Roll Length: 3m

***IES files available on request.**

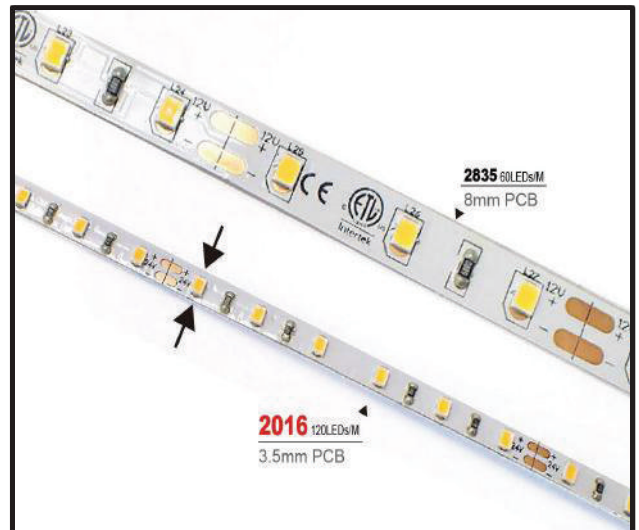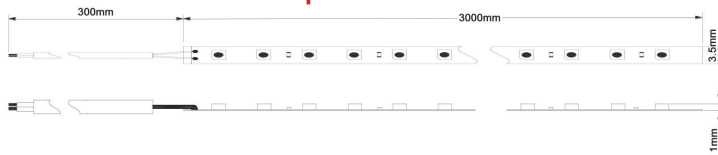

Item No	Product Code	Description
14461	LED-FLS-102T-CW	Ultra Thin 90CRI 2016 LED Strip-120leds Cool White 5700-6500K 24V 24W 1800Lm 3m reels
14462	LED-FLS-102T-NW	Ultra Thin 90CRI 2016 LED Strip-120leds Neutral White 3700-4250K 24V 24W 1800Lm 3m reels
14463	LED-FLS-102T-WW	Ultra Thin 90CRI 2016 LED Strip-120leds Warm White 2900-3200K 24V 24W 1800Lm 3m reels
14464	LED-FLS-102T-UW	Ultra Thin 90CRI 2016 LED Strip-120leds Ultra Warm 2300-2600K 24V 24W 1800Lm 3m reels

When Colour Consistency and Lumen Depreciation Matter